

MiniTrack Wet Inlay


ISO 15 693, ISO 18 000-3 Mode 1

NXP ICode SLIX2

Sales code 3005874

Mechanical dimensions

A1 x A2	Antenna size	14 x 31 mm	± 0,5 mm	0,551 x 1,220 in
B1 x B2	Die-cut size	18 x 36 mm	± 0,2 mm	0,709 x 1,417 in
C	Web width	26 mm	± 0,5 mm	1,024 in
D	Pitch, length per piece MD	42 mm	± 1,5 mm	1,654 in
E	Die-cut to web edge	4 mm	± 1,5 mm	0,157 in
F	Die-cut to register mark	1,5 mm	± 1,0 mm	0,059 in
G	Antenna to die-cut (MD)	2,5 mm	± 1,5 mm	0,098 in
H	Antenna to die-cut (CD)	2 mm	± 1,5 mm	0,079 in
I	Minimum size of register mark (width x length)	5x3 mm		0,197 x 0,118 in
U	Die-cut corner radius	3 mm		0,118 in
	Thickness of the IC	127 µm	± 15 %	
	Overall thickness of transponder package (excluding IC and siliconized paper)	134 µm	± 10 %	

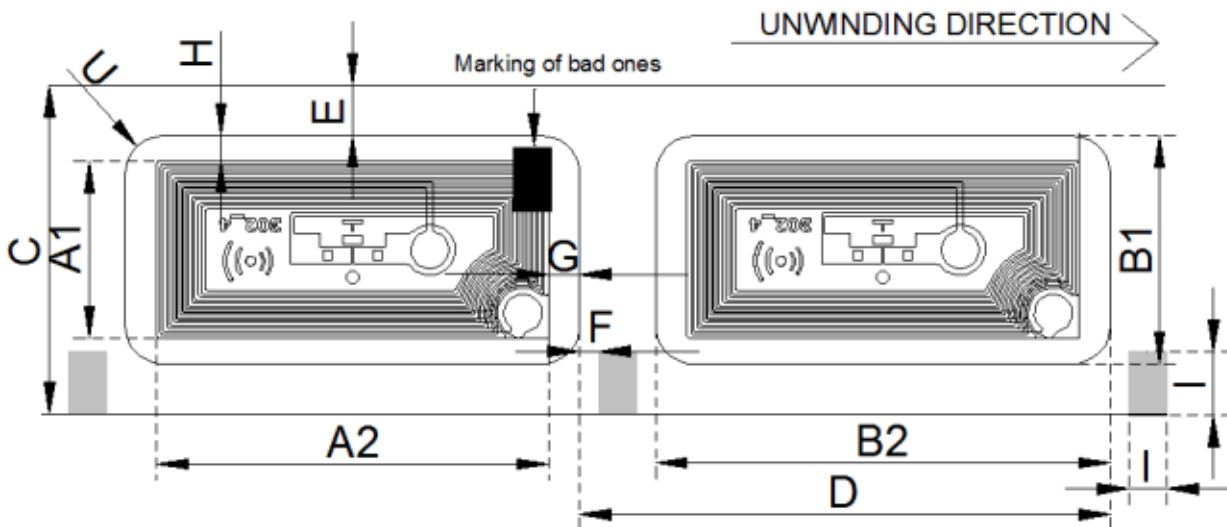

Electrical characteristics

Integrated Circuit (IC)	NXP ICode SLIX2	
Air interface protocol	ISO 15 693, ISO 18 000-3 Mode 1	
Operation frequency	13,56 MHz	
Unloaded resonance frequency	TBD	
Memory	2.5k bits user memory	


General characteristics of transponder

Operating temperature (electronics parts)	-40 °C / +85 °C	-40 °F / 185 °F
ESD voltage immunity	± 2 kV peak HBM	
Shelf life: From the date of manufacture 2 years in	+20 °C, 50 % RH	68 °F, 50 % RH
Bending diameter (D)	> 50 mm, tension less than 10 N	

Delivery form

Transponder format	Die-cut	
Transponder face material	Clear PET 12	
Transponder backing material	Siliconized Paper 56	
Transponder antenna material	Aluminum	
Transponder adhesive	RA-4	
- labelling temperature	min. +5 °C	min. 41 °F
- usage temperature	-10 °C - 90 °C	14 °F - 194 °F
- peel	min. 19 N / 25 mm (FTM 1)	
Final inspection	100 %, known faulty ones marked	
Minimum delivery yield	95 %	
Reel Label	Reel number, Material number, Material description, Yield, Qty of functional inlays, Qty of non-functional inlays, Date	
Printability	Needs to be tested by customer	

Structure

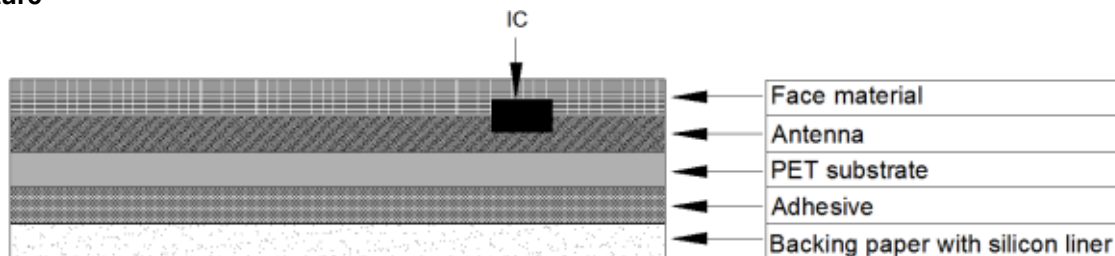

Delivery details

Appearance	Single row reel form
Reel core	Paper core inner diameter 76 mm (3 in)
Transponder alignment	Chip in the middle of transponder
Winding of the reel	Face out
Reel size	4000 pcs/reel
Package size	12000 pcs/box Deliveries only in full packages.

Disclaimer:

SMARTRAC reserves the right to change its products and services at any time without notice. Our recommendations are based on our best knowledge and experience. As the products are used outside our control we cannot take responsibility for any damage that may be caused when using the product. Use extra care in handling the product.

This technical specification replaces all earlier ones.

Version 1
Update date 13 June 2016
Author SMARTRAC /
Approved SMARTRAC / 23.6.2016 k731451

