

Bling Wet Inlay


EPC Class 1 Gen 2, ISO 18 000-6C

Impinj Monza R6

Sales code 3005455

Mechanical dimensions

A1 x A2	Antenna size	22 x 12 mm	± 0,5 mm	0,866 x 0,472 in
B1 x B2	Die-cut size	25 x 15 mm	± 0,2 mm	0,984 x 0,591 in
C	Web width	28 mm	± 0,5 mm	1,102 in
D	Pitch, length per piece MD	20 mm	± 1,5 mm	0,787 in
E	Die-cut to web edge	1,5 mm	± 1,5 mm	0,059 in
U	Die-cut corner radius	1mm		0,039 in

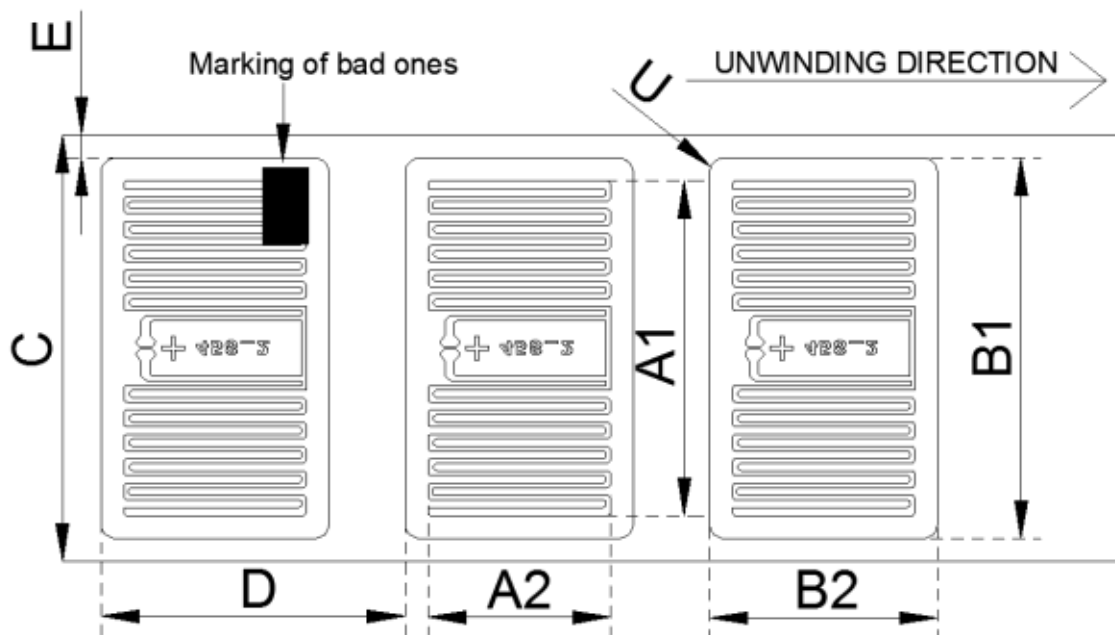

Electrical characteristics

Integrated Circuit (IC)	Impinj Monza R6
Air interface protocol	EPC Class 1 Gen 2, ISO 18 000-6C
Operation frequency	860 - 960 MHz
Memory	96 bit


General characteristics of transponder

Operating temperature (electronics parts)	-40 °C / +85 °C	-40 °F / 185 °F
ESD voltage immunity	± 2 kV peak HBM	
Shelf life: From the date of manufacture 2 years in	+20 °C, 50 % RH	68 °F, 50 % RH
Bending diameter (D)	> 50 mm, tension less than 10 N	

Delivery form

Transponder format	Die-cut	
Transponder face material	Clear PET 50	
Transponder antenna material	Aluminum	
Transponder adhesive	RA-5	
- labelling temperature	min. +0 °C	min. 32 °F
- usage temperature	-20 °C - 80 °C	-4 °F - 176 °F
- peel	min. 2 N / 25 mm (FTM 1)	
Final inspection	100 %, known faulty ones marked	
Minimum delivery yield	97 %	
Reel Label	Reel number, Material number, Material description, Yield, Qty of functional inlays, Qty of non-functional inlays, Date	

Structure

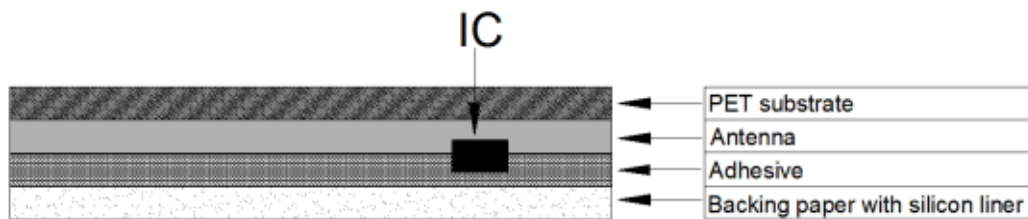

Delivery details

Appearance	Single row reel form
Reel core	Paper core inner diameter 76 mm (3 in)
Winding of the reel	Face out
Reel size	5000 pcs/reel
Package size	15000 pcs/box Deliveries only in full packages.

Disclaimer:

SMARTRAC reserves the right to change its products and services at any time without notice. Our recommendations are based on our best knowledge and experience. As the products are used outside our control we cannot take responsibility for any damage that may be caused when using the product. Use extra care in handling the product.

Products classified as FIS samples have the released for production (RFP) product's form factor, RF performance and IC functionality. FIS samples represent the RFP products in most aspects. FIS samples are delivered without any warranty. During the FIS phase, SMARTRAC reserves the right to modify product specifications without notice.

This technical specification replaces all earlier ones.

Version	1
Update date	9 February 2016
Author	SMARTRAC / KTolonen
Approved	SMARTRAC / 10.2.2016 k734581

