

### DogBone Dry Inlay


EPC Class 1 Gen 2, ISO 18 000-6C

NXP UCode 8

Sales code 3006908

### Mechanical dimensions

A1 x A2	Antenna size	94 x 24 mm	$\pm 0,5$ mm	3,701 x 0,945 in
C	Web width	97 mm	$\pm 0,5$ mm	3,819 in
D	Pitch, length per piece MD	30 mm	$\pm 0,5$ mm	1,181 in
K	Antenna to web edge	1,5 mm	$\pm 1,0$ mm	0,059 in

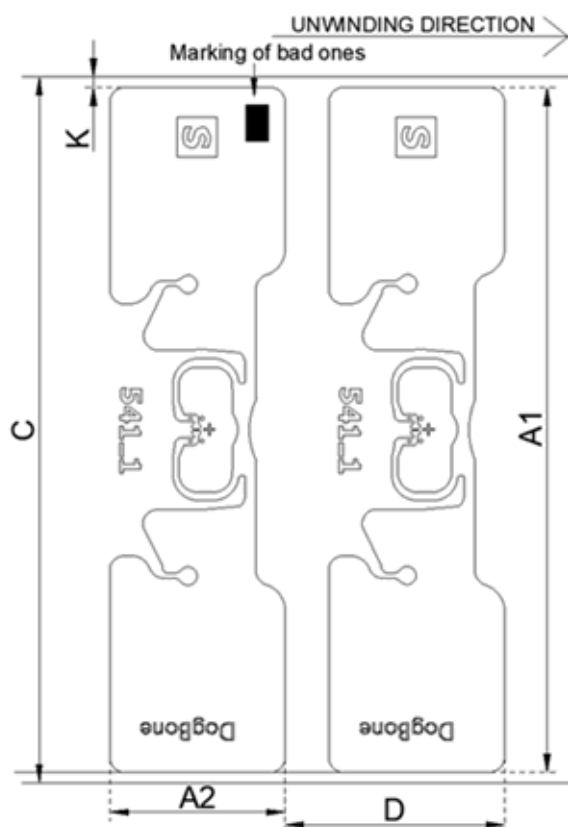

### Electrical characteristics

Integrated Circuit (IC)	NXP UCode 8
Air interface protocol	EPC Class 1 Gen 2, ISO 18000-63
Operation frequency	860 - 960 MHz
Memory	128 bit EPC


## General characteristics of transponder

Operating temperature (electronics parts)	-40 °C / +85 °C	-40 °F / 185 °F
ESD voltage immunity	± 2 kV peak HBM	
Shelf life: From the date of manufacture 2 years in	+20 °C, 50 % RH	68 °F, 50 % RH
Bending diameter (D)	> 50 mm, tension less than 10 N	

## Delivery form

Transponder format	Continuous 1-wide
Transponder face material	Clear PET 12
Transponder antenna material	Aluminum
Final inspection	100 %, known faulty ones marked
Minimum delivery yield	95 %
Reel Label	Reel number, Material number, Material description, Yield, Qty of functional inlays, Qty of non-functional inlays, Date

## Structure

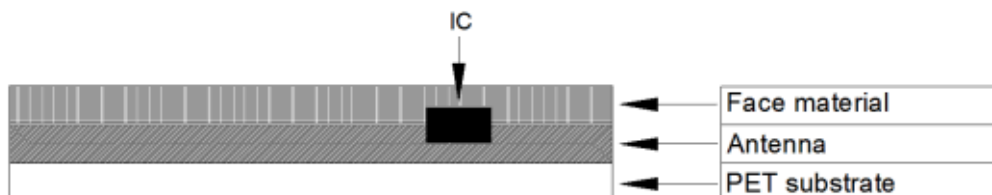

## Delivery details

Appearance	Single row reel form
Reel core	Paper core inner diameter 76 mm (3 in)
Winding of the reel	Face out
Reel size	10000 pcs/reel
Package size	20000 pcs/box Deliveries only in full packages.

### Disclaimer:

SMARTRAC reserves the right to change its products and services at any time without notice. Our recommendations are based on our best knowledge and experience. As the products are used outside our control we cannot take responsibility for any damage that may be caused when using the product. Use extra care in handling the product.

Products classified as FIS samples have the released for production (RFP) product's form factor, RF performance and IC functionality. FIS samples represent the RFP products in most aspects. FIS samples are delivered without any warranty. During the FIS phase, SMARTRAC reserves the right to modify product specifications without notice.

This technical specification replaces all earlier ones.

Version 1  
Update date 22 March 2018  
Author SMARTRAC /  
Approved SMARTRAC / 28.3.2018 Matti  
Tavilampi/Smarttrac

